

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 1 338 641 A1

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
27.08.2003 Bulletin 2003/35

(21) Application number: 03003165.2

(22) Date of filing: 18.02.2003

(51) Int Cl.7: **C10M 141/02, C10M 141/06**  
// (C10M141/06, 101:02,  
129:76, 133:06, 133:56, 137:10,  
159:22, 159:24), C10N40:25

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR**  
**HU IE IT LI LU MC NL PT SE SI SK TR**  
Designated Extension States:  
**AL LT LV MK RO**

(30) Priority: 22.02.2002 JP 2002045576

(71) Applicants:  
• **NISSAN MOTOR COMPANY, LIMITED**  
Yokohama-shi, Kanagawa 221-0023 (JP)  
• **Nippon Oil Corporation**  
Tokyo 105-8412 (JP)

(72) Inventors:  
• **Shirahama, Shinichi, Nippon Oil Corporation**  
Yokohama-shi, Kanagawa 231-0815 (JP)

- **Konishi, Shozaburo, Nippon Oil Corporation**  
Yokohama-shi, Kanagawa 231-0815 (JP)
- **Kano, Makoto**  
Yokohama-shi, Kanagawa 245-0002 (JP)
- **Yasuda, Yoshiteru**  
Yokohama-shi, Kanagawa 236-0012 (JP)
- **Sakane, Tokio**  
Yokohama-shi, Kanagawa 236-0032 (JP)

(74) Representative: **Grünecker, Kinkeldey,**  
**Stockmair & Schwanhäusser Anwaltssozietät**  
Maximilianstrasse 58  
80538 München (DE)

(54) **Low-friction sliding mechanism**

(57) A low-friction sliding mechanism of the present invention comprises first and second sliding members slidable relative to each other at sliding surfaces thereof and a lubricant being applied to the sliding surfaces of the first and second sliding members. The first and second members are made of a diamond-like carbon ma-

terial and an iron-based material, respectively, and the lubricant comprises a base oil and at least one of an ashless fatty-ester friction modifier and an ashless aliphatic-amine friction modifier.

EP 1 338 641 A1

## Description

BACKGROUND OF THE INVENTION

5 [0001] The present invention relates to a sliding mechanism having excellent low-friction characteristics, particularly of the kind for use in an internal combustion engine.

[0002] Global environmental problems, such as global warming and ozone layer destruction, have been coming to the fore. It is said that the global warming is significantly effected by CO<sub>2</sub> emission. The reduction of CO<sub>2</sub> emission, notably the setting of CO<sub>2</sub> emission standards, has therefore become a big concern to each country.

10 [0003] One of challenges to reduce CO<sub>2</sub> emission is to improve vehicle fuel efficiency, and the sliding mechanism of a vehicle engine is largely involved in the improvements in vehicle fuel efficiency. There are the following approaches to improving the vehicle efficiency in terms of the sliding mechanism: (1) to provide a higher abrasion resistance and a lower friction coefficient for sliding members of the sliding mechanism, which are generally made of steel materials in the earlier technology, even under extreme conditions of abrasion and friction; (2) to decrease the viscosity of a lubricant in the sliding mechanism, thereby reducing viscous resistance in hydrodynamic lubrication regions and agitation resistance in the engine; and (3) to mix a suitable friction modifier and other additives into the lubricant so as to reduce friction losses under the conditions of mixed lubrication and boundary lubrication. Heretofore, researches have been made on an organomolybdenum compound, such as molybdenum dithiocarbamate (MoDTC) or molybdenum dithiophosphate (MoDTP), for use as the friction modifier and show that the lubricant containing such an organomolybdenum compound is effective in reducing friction when used for the steel sliding members.

SUMMARY OF THE INVENTION

25 [0004] Various hard coating materials have been recently applied to the sliding member of the sliding mechanism in order to attain high abrasion resistance and a low friction coefficient. In particular, a diamond-like carbon (DLC) material is expected to be useful as a coating material for the sliding member, because the DLC material provides a lower friction coefficient in the air than that of another abrasion-resistant hard coating material (such as TiN or CrN).

30 [0005] However, the DLC material does not provide such a low friction coefficient in the sliding mechanism in the presence of lubricant (as disclosed in Japan Tribology Congress 1999. 5, Tokyo, Proceeding Page 11-12, KANO et. al.). The friction coefficient of the DLC material cannot be lowered to a sufficient degree even when used in combination with the lubricant containing the above organomolybdenum compound (as disclosed in World Tribology Congress 2001. 9, Vienna, Proceeding Page 342, KANO et.al.).

35 [0006] It is therefore an object of the present invention to provide a sliding mechanism that can attain excellent low-friction characteristics and high abrasion resistance by the combined use of a diamond-like carbon material and a lubricant, so that the sliding mechanism, when used in a vehicle engine, shows more improvements in vehicle fuel efficiency than that of the earlier technology.

40 [0007] According to an aspect of the present invention, there is provided a low-friction sliding mechanism, comprising: first and second sliding members slidable relative to each other at sliding surfaces thereof, the first sliding member being made of a diamond-like carbon material, the second sliding member being made of an iron-based material; and a lubricant applied to the sliding surfaces of the first and second sliding members and comprising at least one of an ashless fatty-ester friction modifier and an ashless aliphatic-amine friction modifier.

DESCRIPTION OF THE EMBODIMENTS

45 [0008] The present invention will be described below in detail. In the following description, all percentages (%) are by mass unless otherwise specified.

[0009] A sliding mechanism according to the present invention comprises first and second sliding members slidable relative to each other at sliding surfaces thereof and a lubricant applied to the sliding surfaces of the first and second sliding members.

50 [0010] The first sliding member is made of a diamond-like carbon (DLC) material. The DLC material is an amorphous form of carbon in which carbon exists in both sp<sup>2</sup> and sp<sup>3</sup> hybridizations so as to form a composite structure of graphite and diamond. Specific examples of the DLC material usable in the present invention include hydrogen-free amorphous carbon (a-C) consisting of carbon, hydrogen-containing amorphous carbon (a-C:H) and metal carbide (MeC) containing a metal element of titanium (Ti) or Molybdenum (Mo). In the present invention, especially preferred is hydrogen-free amorphous carbon (a-C) for significant reduction in friction.

55 [0011] The second sliding member is made of an iron-based material. Specific examples of the iron-based material usable in the present invention include: low-alloy chilled cast iron; carburized steel based on e.g. SCM420 (according to JIS G4105) and SCr420 (according to JIS G4104); heat-treated carbon steel based on e.g. S40C (according to JIS

G 4051); and mixtures of two or more thereof.

[0012] Each of the first and second sliding members preferably has at the sliding surface thereof an arithmetic mean surface roughness  $R_a$  of  $0.1\text{ }\mu\text{m}$  or less for stable sliding contact. When the surface roughness  $R_a$  exceeds  $0.1\text{ }\mu\text{m}$ , there arises a possibility of localized scuffing in the sliding surface so that the friction coefficient between the sliding surfaces becomes largely increased.

[0013] Further, the first sliding member preferably has a micro Vickers hardness  $H_v$  of 1,000 to 3,500 (with a 1 kg load applied) at the sliding surface thereof and a thickness  $t$  of  $0.3$  to  $2.0\text{ }\mu\text{m}$ , and the second sliding member preferably has a Rockwell hardness HRC of 45 to 60 on C scale at the sliding surface thereof. This makes it possible to maintain the durability of the first and second sliding members even under the sliding condition of a high surface pressure of about 700 MPa (that corresponds to the pressure condition of an engine cam mechanism). When the micro Vickers hardness  $H_v$  and the thickness  $t$  are less than 1,000 and  $0.3\text{ }\mu\text{m}$ , respectively, the first sliding member tends to wear out. On the other hand, when the micro Vickers hardness  $H_v$  and the thickness  $t$  exceed 3,500 and  $2.0\text{ }\mu\text{m}$ , respectively, the first sliding member tends to flake off. When the Rockwell hardness HRC is less than 45, the second sliding member tends to buckle under a high surface pressure.

[0014] The lubricant comprises a base oil and at least one of an ashless fatty-ester friction modifier and an ashless aliphatic-amine friction modifier.

[0015] The base oil is not particularly limited, and can be any oil compounds commonly used for a lubricant, such as mineral oil or synthetic oil.

[0016] Specific examples of the mineral oil include oil compounds prepared by extracting a lubricant fraction from petroleum by atmospheric or reduced-pressure distillation and then purifying the obtained lubricant fraction by at least one of the following treatments: solvent deasphalting, solvent extraction, hydrogenolysis, solvent dewaxing, hydrotreating and wax isomerization. In the present invention, the mineral oil prepared through hydrogenolysis, hydrotreating and/or wax isomerization is preferably used.

[0017] Specific examples of the synthetic oil include: alkylbenzenes, alkylnaphthalenes, polybutenes and hydrides thereof; poly- $\alpha$ -olefins, such as 1-octene oligomer and 1-decene oligomer, and hydrides thereof; diesters, such as dilauryl glutarate, dioctyl adipate, diisodecyl adipate, dilauryl adipate and dioctyl sebacate; polyol esters, such as trimethylolpropane caprylate, trimethylolpropane pelargonate, pentaerythritol-2-ethyl hexanoate and pentaerythritol pelargonate; and mixtures thereof. Among these synthetic oil compounds, preferred are poly- $\alpha$ -olefins, such as 1-octene oligomer and 1-decene oligomer and hydrides thereof.

[0018] The above-mentioned mineral and synthetic oil compounds may be used alone, or in the form of a mixture of any two or more thereof with no limitation on its mixture ratio.

[0019] The aromatic content of the base oil is not particularly restricted. Herein, the aromatic content is defined as the amount of an aromatics fraction determined according to ASTM D2549 "Standard Test Method for Separation of Representative Aromatics and Nonaromatics Fractions of High-Boiling Oils by Elution Chromatography". The aromatics fraction generally includes alkylbenzenes, alkylnaphthalenes, anthracene, phenanthrene and alkylates thereof, condensed-ring compounds having four or more benzeoid rings fused together, and heteroaromatic compounds such as pyridines, quinolines, phenols and naphthols. In the present invention, the aromatic content of the base oil is preferably 15% or less, more preferably 10% or less and most preferably 8% or less. When the aromatic content exceeds 15%, the base oil undesirably deteriorates in oxidation stability. It is noted that the lubricant may be able to produce a high friction reducing effect, even if the aromatic content of the base oil is 2% or less (inclusive of 0%). In such a case, however, there arise a possibility that the lubricant deteriorates in storage stability, e.g., when the fatty-ester friction modifier and/or aliphatic-amine friction modifier is contained in an amount of more than 1%. Thus, the aromatic content of the base oil is preferably adjusted to e.g. 2% or more by adding solvent refining mineral oil, alkylbenzene or the like as needed.

[0020] Further, the kinematic viscosity of the base oil is not particularly restricted. The kinematic viscosity of the base oil is preferably  $2\text{ mm}^2/\text{s}$  or higher, more preferably  $3\text{ mm}^2/\text{s}$  and, at the same time, is preferably  $20\text{ mm}^2/\text{s}$  or lower, more preferably  $10\text{ mm}^2/\text{s}$  or lower, most preferably  $8\text{ mm}^2/\text{s}$  or lower, as measured at  $100^\circ\text{C}$  so as to be suitable for use in an internal combustion engine. When the kinematic viscosity is  $2\text{ mm}^2/\text{s}$  or higher, the lubricant can attain a high lubricity by forming a sufficient lubricant film and minimize its boil-off even under the high surface-pressure condition. When the kinematic viscosity is  $20\text{ mm}^2/\text{s}$  or lower, the lubricant can minimize friction resistance in lubrication regions by decreasing fluid resistance.

[0021] The viscosity index of the base oil is not particularly restricted, and is preferably 80 or higher, more preferably 100 or higher, most preferably 120 or higher, so as to be suitable for use in an internal combustion engine. When the base oil has a higher index, the lubricant can not only attain excellent low-temperature viscosity characteristics and but also produce a good friction reducing effect.

[0022] The fatty-ester friction modifier and the aliphatic-amine friction modifier are an fatty acid ester and an aliphatic amine having  $\text{C}_6$ - $\text{C}_{30}$  straight or branched hydrocarbon chains, preferably  $\text{C}_8$ - $\text{C}_{24}$  straight or branched hydrocarbon chains, more preferably  $\text{C}_{10}$ - $\text{C}_{20}$  straight or branched hydrocarbon chains, respectively. When the carbon number of

the hydrocarbon chain is not within the range of 6 to 30, there arises a possibility that the lubricant may not produce a sufficient friction reducing effect as expected in the present invention.

[0023] Specific examples of the  $C_6$ - $C_{30}$  straight or branched hydrocarbon chain usable in the present invention include: alkyl groups, such as hexyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl, tridecyl, tetradecyl, pentadecyl, hexadecyl, heptadecyl, octadecyl, nonadecyl, eicosyl, heneicosyl, docosyl, tricosyl, tetracosyl, pentacosyl, hexacosyl, heptacosyl, octacosyl, nonacosyl and triacontyl; and alkenyl groups, such as hexenyl, heptenyl, octenyl, nonenyl, decenyl, undecenyl, dodecenyl, tridecenyl, tetradecenyl, pentadecenyl, hexadecenyl, heptadecenyl, octadecenyl, nonadecenyl, eicosenyl, heneicosenyl, docosenyl, tricosenyl, tetracosenyl, pentacosenyl, hexacosenyl, heptacosenyl, octacosenyl, nonacosenyl and triacontenyl. The above alkyl and alkenyl groups include all possible isomers.



[0024] The fatty acid ester can be exemplified by esters of fatty acids having the above hydrocarbon groups and monofunctional aliphatic alcohols or aliphatic polyols. Specific examples of the fatty acid ester usable in the present invention include glycerol monolate, glycerol diolate, sorbitan monolate and sorbitan diolate.

[0025] The aliphatic amine can be exemplified by: aliphatic monoamines, aliphatic polyamines and alkylene oxide adducts thereof; imidazoline compounds; and derivatives thereof. Specific examples of the aliphatic amines usable in the present invention include: aliphatic monoamines and polyamines, such as laurylamine, lauryldiethylamine, lauryldiethanolamine, dodecylidipropylamine, palmitylamine, stearyl tetraethylenepentamine, oleylamine, oleylpropylenediamine, oleyldiethanolamine and N-hydroxyethyl-oleylimidazolyne; adducts of the above aliphatic amines ( $C_6$ - $C_{28}$  alkyl or alkenyl amines) with alkylene oxides, such as N,N-dipolyoxyalkylene-N-alkylamines; and acid-modified compounds prepared by reacting the above aliphatic amines with  $C_2$ - $C_{30}$  monocarboxylic acids (such as fatty acids) or  $C_2$ - $C_{30}$  polycarboxylic acids (such as oxalic acid, phthalic acid, trimellitic acid and pyromellitic acid) so as to neutralize or amidate the whole or part of the remaining amino and/or imino groups. In the present invention, especially preferred is N,N-dipolyoxyethylene-N-oleylamine.

[0026] The amount of the fatty-ester friction modifier and/or the aliphatic-amine friction modifier added in the lubricant is not particularly restricted, and is preferably 0.05 to 3.0%, more preferably 0.1 to 2.0%, most preferably 0.5 to 1.4%, based on the total mass of the lubricant. When the amount of the fatty-ester friction modifier and/or the aliphatic-amine friction modifier is less than 0.05%, there arises a possibility that the lubricant may not produce a sufficient friction reducing effect. When the amount of the fatty-ester friction modifier and/or the aliphatic-amine friction modifier exceeds 3.0%, the lubricant produce a good friction reducing effect but undesirably deteriorates in storage stability and compatibility between and the base oil and the friction modifier to cause precipitations.

[0027] Preferably, the lubricant further includes, as an ashless dispersant, polybutenyl succinimide and/or a derivative thereof.

[0028] The polybutenyl succinimide usable in the present invention can be exemplified by compounds represented by the following general formulas (1) and (2).

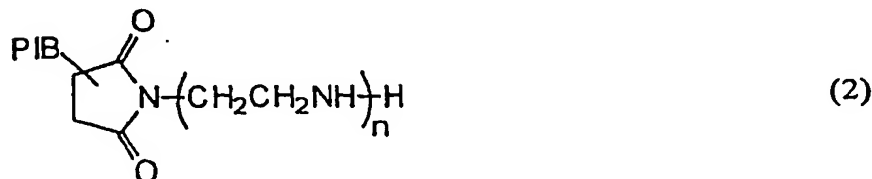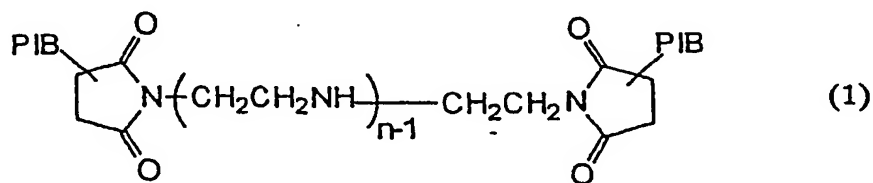

In each of the formulas (1) and (2), PIB represents a polybutenyl group derived from a polybutene, which is prepared by polymerizing high-purity isobutene or a mixture of 1-butene and isobutene in the presence of a boron fluoride catalyst or an aluminum chloride catalyst in such a manner that the polybutene attains a number-average molecular weight of

900 to 3,500, preferably 1,000 to 2,000. When the number-average molecular weight of the polybutene is less than 900, there is a possibility of failing to attain a sufficient detergent effect. When the number-average molecular weight of the polybutene exceeds 3,500, the polybutene undesirably tends to deteriorate in low-temperature fluidity. In the production of polybutenyl succinimide, the polybutene may be used after purified by removing trace amounts of fluorine and chlorine residues, which result from the above polybutene production catalyst, by any suitable treatment, such as adsorption process or washing process. The amount of such fluorine and chlorine residues is preferably controlled to 50 ppm or less, more preferably 10 ppm or less, most preferably 1 ppm or less. Further, n represents an integer of 1 to 5, preferably 2 to 4, so as to attain a good detergent effect.

[0029] The production method of polybutenyl succinimide is not particularly restricted. For example, the polybutenyl succinimide can be prepared by reacting an chloride of the above-mentioned polybutene or the polybutene from which fluorine and chlorine residues are removed with maleic anhydride at 100 to 200°C to form butenyl succinate, and then, reacting the thus-formed butenyl succinate with a polyamine, such as diethylene triamine, triethylene tetramine, tetraethylene pentamine or pentaethylene hexamine.

[0030] The derivative of polybutenyl succinimide can be exemplified by boron- and acid-modified compounds obtained by reacting the polybutenyl succinimide of the formulas (1) and (2) with boron compounds or oxygen-containing organic compounds so as to neutralize or amidate the whole or part of the remaining amino and/or imide groups. In the present invention, boron-containing polybutenyl succinimide, especially boron-containing bis(polybutenyl)succinimide, is preferably used. Herein, the content ratio of nitrogen to boron (B/N) by mass in the boron-containing polybutenyl succinimide is usually 0.1 to 3, preferably 0.2 to 1.

[0031] The above boron compound can be a boric acid, a borate or a boric acid ester. Specific examples of the boric acid include orthoboric acid, metaboric acid and paraboric acid. Specific examples of the borate include: ammonium salts including ammonium borates, such as ammonium metaborate, ammonium tetraborate, ammonium pentaborate and ammonium octaborate. Specific examples of the boric acid ester include: esters of boric acids and alkylalcohols (preferably C<sub>1</sub>-C<sub>6</sub> alkylalcohols), such as monomethyl borate, dimethyl borate, trimethyl borate, monoethyl borate, diethyl borate, triethyl borate, monopropyl borate, dipropyl borate, tripropyl borate, monobutyl borate, dibutyl borate and tributyl borate.

[0032] The above oxygen-containing organic compound can be exemplified by: C<sub>1</sub>-C<sub>30</sub> monocarboxylic acids, such as formic acid, acetic acid, glycolic acid, propionic acid, lactic acid, butyric acid, valeric acid, caproic acid, enanthic acid, caprylic acid, pelargonic acid, capric acid, undecylic acid, lauric acid, tridecanoic acid, myristic acid, pentadecanoic acid, palmitic acid, margaric acid, stearic acid, oleic acid, nonadecanoic acid and eicosanoic acid; C<sub>2</sub>-C<sub>30</sub> polycarboxylic acids, such as oxalic acid, phthalic acid, trimellitic acid and pyromellitic acid, and anhydrides and esters thereof; C<sub>2</sub>-C<sub>6</sub> alkylene oxides; and hydroxy(poly)oxyalkylene carbonates.

[0033] The amount of the polybutenyl succinimide and/or the derivative thereof added in the lubricant is not particularly restricted, and is preferably 0.1 to 15%, more preferably 1.0 to 12%, based on the total mass of the lubricant. When the amount of the polybutenyl succinimide and/or the derivative thereof is less than 0.1%, there arises a possibility of failing to attain a sufficient detergent effect. It becomes uneconomical when the amount of the polybutenyl succinimide and/or the derivative thereof exceeds 15%. In addition, such a large amount of the polybutenyl succinimide and/or the derivative thereof tends to deteriorate in demulsification ability.

[0034] Further, the lubricant preferably includes, as an antioxidant and as an anti-wear agent, zinc dithiophosphate represented by the following general formula (3).



In the general formula (3), R<sup>4</sup>, R<sup>5</sup>, R<sup>6</sup> and R<sup>7</sup> each represent C<sub>1</sub>-C<sub>24</sub> hydrocarbon groups. The C<sub>1</sub>-C<sub>24</sub> hydrocarbon group is preferably a C<sub>1</sub>-C<sub>24</sub> straight-chain or branched-chain alkyl group, a C<sub>3</sub>-C<sub>24</sub> straight-chain or branched-chain alkenyl group, a C<sub>5</sub>-C<sub>13</sub> cycloalkyl group, a C<sub>5</sub>-C<sub>13</sub> straight-chain or branched-chain alkylaryl group, a C<sub>6</sub>-C<sub>18</sub> aryl group, a C<sub>6</sub>-C<sub>18</sub> straight-chain or branched-chain alkylaryl group or a C<sub>7</sub>-C<sub>19</sub> arylalkyl group. The above alkyl group or alkenyl group can be primary, secondary or tertiary. Specific examples of R<sup>4</sup>, R<sup>5</sup>, R<sup>6</sup> and R<sup>7</sup> include: alkyl groups, such as methyl, ethyl, propyl, butyl, pentyl, hexyl, heptyl, octyl, nonyl, decyl, undecyl, dodecyl, tridecyl, tetradecyl, pentadecyl, hexadecyl, heptadecyl, octadecyl, nonadecyl, eicosyl, heneicosyl, docosyl, tricosyl, tetracosyl; alkenyl groups, such as propenyl, isopropenyl, butenyl, butadienyl, pentenyl, hexenyl, heptenyl, octenyl, nonenyl, decenyl, undecenyl, dodecenyl, tridecenyl, tetradecenyl, pentadecenyl, hexadecenyl, heptadecenyl, octadecenyl (oleyl), non-

adecenyl, eicosenyl, heneicosenyl, docosenyl, tricosenyl and tetracosenyl; cycloalkyl groups, such as cyclopentyl, cyclohexyl and cycloheptyl; alkylcycloalkyl groups, such as methylcyclopentyl, dimethylcyclopentyl, ethylcyclopentyl, propylcyclopentyl, ethylmethylcyclopentyl, trimethylcyclopentyl, diethylcyclopentyl, ethyldimethylcyclopentyl, propylmethylcyclopentyl, propylethylcyclopentyl, di-propylcyclopentyl, propylethylmethylcyclopentyl, methylcyclohexyl, dimethylcyclohexyl, ethylcyclohexyl, propylcyclohexyl, ethylmethylcyclohexyl, trimethylcyclohexyl, diethylcyclohexyl, ethyldimethylcyclohexyl, propylmethylcyclohexyl, propylethylcyclohexyl, di-propylcyclohexyl, propylethylmethylcyclohexyl, methylcycloheptyl, dimethylcycloheptyl, ethylcycloheptyl, propylcycloheptyl, ethylmethylcycloheptyl, trimethylcycloheptyl, diethylcycloheptyl, ethyldimethylcycloheptyl, propylmethylcycloheptyl, propylethylcycloheptyl, di-propylcycloheptyl and propylethylmethylcycloheptyl; aryl groups, such as phenyl and naphthyl; alkylaryl groups, such as tolyl, xylol, ethylphenyl, propylphenyl, ethylmethylphenyl, trimethylphenyl, butylphenyl, propylmethylphenyl, diethylphenyl, ethyldimethylphenyl, tetramethylphenyl, pentylphenyl, hexylphenyl, heptylphenyl, octylphenyl, nonylphenyl, decylphenyl, undecylphenyl and dodecylphenyl; and arylalkyl groups, such as benzyl, methylbenzyl, dimethylbenzyl, phenethyl, methylphenethyl and dimethylphenethyl. The above hydrocarbon groups include all possible isomers.

**[0035]** Specific examples of the zinc dithiophosphate usable in the present invention include zinc diisopropylidithiophosphate, zinc diisobutylidithiophosphate, zinc di-sec-butylidithiophosphate, zinc di-sec-pentylidithiophosphate, zinc di-n-hexylidithiophosphate, zinc di-sec-hexylidithiophosphate, zinc di-octylidithiophosphate, zinc di-2-ethylhexylidithiophosphate, zinc di-n-decylidithiophosphate, zinc di-n-dodecylidithiophosphate, zinc diisotridecylidithiophosphate and mixtures thereof.

**[0036]** The amount of the zinc dithiophosphate added in the lubricant is not particularly restricted. The zinc dithiophosphate is preferably contained in an amount of 0.1% or less, more preferably in an amount of 0.06% or less, most preferably in a minimum effective amount, in terms of phosphorus element based on the total mass of the lubricant in order to produce a higher friction reducing effect. When the amount of the zinc dithiophosphate exceeds 0.1%, there arises a possibility that effect of the ashless friction modifier may be inhibited.

**[0037]** The zinc dithiophosphate can be prepared by any known method. For example, the zinc dithiophosphate may be prepared by reacting alcohols or phenols having the above R<sup>4</sup>, R<sup>5</sup>, R<sup>6</sup> and R<sup>7</sup> hydrocarbon groups with phosphorous pentasulfide to form dithiophosphoric acid, and then, neutralizing the thus-formed dithiophosphoric acid with zinc oxide. Herein, the molecular structure of zinc dithiophosphate differs according to the alcohol or phenol used as a raw material for the zinc dithiophosphate production.

**[0038]** The lubricant of the present invention may further include any other additive or additives, such as a metallic detergent, an antioxidant, a viscosity index improver, a friction modifier other than the above-mentioned fatty-ester friction modifier and/or the aliphatic-amine friction modifier, an ashless dispersant other than the above-mentioned polybutenyl succinimide and/or the derivative thereof, an anti-wear agent or extreme-pressure additive, a rust inhibitor, a nonionic surfactant, a demulsifier, a metal deactivator and/or an anti-foaming agent, to be used in an internal combustion engine. These additives may be used alone or in the form of a mixture of two or more thereof so as to meet the lubricant performance required.

**[0039]** The metallic detergent can be any compound commonly used for a lubricant. Specific examples of the metallic detergent usable in the present invention include sulfonates, phenates and salicylates of alkali metals or alkali-earth metals; and mixtures of two or more thereof. Examples of the alkali metals include sodium (Na) and potassium (K), and examples of the alkali-earth metals include calcium (Ca) and magnesium (Mg). In the present invention, sodium and calcium sulfonates, sodium and calcium phenates, and sodium and calcium salicylates are suitably used. The total base number and amount of the metallic detergent can be selected in accordance with the lubricant performance required. The total base number of the metallic detergent is usually 0 to 500 mgKOH/g, preferably 150 to 400 mgKOH/g, as measured by perchloric acid method according to ISO 3771 "Determination of base number - Perchloric acid potentiometric titration method". The amount of the metallic detergent is usually 0.1 to 10% based on the total mass of the lubricant.

**[0040]** The antioxidant can be any compound commonly used for a lubricant. Specific examples of the antioxidant usable in the present invention include: phenolic antioxidants, such as 4,4'-methylenebis(2,6-di-tert-butylphenol) and octadecyl-3-(3,5-di-tert-butyl-4-hydroxyphenyl)propionate; amino antioxidants, such as phenyl- $\alpha$ -naphthylamine, alkylphenyl- $\alpha$ -naphthylamine and alkylidiphenylamine; and mixtures of two or more thereof. The amount of the antioxidant is usually 0.01 to 5% based on the total mass of the lubricant.

**[0041]** The viscosity index improver can be exemplified by: non-dispersion type viscosity index improvers, such as methacrylic acids, copolymers of methacrylic acids and hydrides thereof; and dispersion type viscosity index improvers, such as copolymers of methacrylates (including nitrogen compounds). There may be also used, as the viscosity index improver, copolymers of ethylene and  $\alpha$ -olefins (such as propylene, 1-butene and 1-pentene) and hydrides thereof, polyisobutylenes and hydrides thereof, a hydrogenated copolymer of styrene and diene, a copolymer of styrene and maleic anhydride and polyalkylstyrenes. The molecular weight of the viscosity index improver needs to be selected in view of shear stability. For example, the number-average molecular weight of the viscosity index improver is in a range of 5,000 to 1,000,000, preferably 100,000 to 800,000 for dispersion or non-dispersion type polymethacrylates, in a

range of preferably 800 to 5,000 for polyisobutylenes and hydrides thereof and in a range of 800 to 300,000, preferably 10,000 to 200,000 for ethylene/ $\alpha$ -olefin copolymers and hydrides thereof. The above viscosity index improving compounds can be used alone or in the form of a mixture of two or more thereof. The amount of the viscosity index improver is preferably 0.1 to 40.0% based on the total mass of the lubricant.

[0042] The friction modifier other than the above-mentioned fatty-ester friction modifier and/or the aliphatic-amine friction modifier can be exemplified by ashless friction modifiers, such as boric acid esters, higher alcohols and aliphatic ethers, and metallic friction modifiers, such as molybdenum dithiophosphate, molybdenum dithiocarbamate and molybdenum disulfide.

[0043] The ashless dispersant other than the above-mentioned polybutenyl succinimide and/or the derivative thereof can be exemplified by polybutenylbenzylamines and polybutenylamines each having polybutenyl groups of number-average molecular weight of 900 to 3,500, polybutenyl succinimides having polybutenyl groups of number-average molecular weight of less than 900 and derivatives thereof.

[0044] The anti-friction agent or extreme-pressure additive can be exemplified by disulfides, sulfurized fats and oils, olefin sulfides, phosphate esters having one to three  $C_2$ - $C_{20}$  hydrocarbon groups, thiophosphate esters, phosphite esters, thiophosphite esters and amine salts of these esters.

[0045] The rust inhibitor can be exemplified by alkylbenzene sulfonates, dinonylnaphthalene sulfonates, esters of alkenylsuccinic acids and esters of polyalcohols.

[0046] The nonionic surfactant and the demulsifier can be exemplified by nonionic polyalkylene glycol surfactants, such as polyoxyethylene alkylethers, polyoxyethylene alkylphenylethers and polyoxyethylene alkylphenylethers.

[0047] The metal deactivator can be exemplified by imidazoline compounds, pyrimidine derivatives, thiazole and benzotriazole.

[0048] The anti-foaming agent can be exemplified by silicones, fluorosilicones and fluoroalkylethers.

[0049] Each of the friction modifier other than the fatty-ester friction modifier and/or the aliphatic-amine friction modifier, the ashless dispersant other than the polybutenyl succinimide and/or the derivative thereof, the anti-wear agent or extreme-pressure additive, the rust inhibitor and the demulsifier is usually contained in an amount of 0.01 to 5% based on the total mass of the lubricant, and the metal deactivator is contained in an amount of 0.0005 to 1% based on the total mass of the lubricant.

[0050] With the above-described structure, the sliding mechanism of the present invention allows the first and second sliding members to slide relative each other via the lubricant with the friction between the sliding surfaces being less than that of the earlier technology. Accordingly, the sliding mechanism of the present invention can attain excellent low-friction characteristics and high abrasion resistance to be fit for a variety of uses, especially useful for an internal combustion engine. For example, the first sliding member can be a coating of DLC material applied to a steel base of a disk-shaped shim or applied to a steel end face of a lifter, and the second sliding member can be a cam lobe. The sliding mechanism of the present invention can be also used as a sliding gear of an industrial machine.

[0051] The present invention will be described in more detail by reference to the following examples. However, it should be noted that the following examples are only illustrative and not intended to limit the invention thereto.

#### Examples 1 to 14 and Comparative Examples 1 to 5

##### (1) Assembly of Cam Units

[0052] In Examples 1 to 14 and Comparative Examples 1 to 5, cam units were assembled. The cam units were designed by simulating a typical camshaft of a vehicle engine, and each cam unit comprised one cam lobe and one cam follower having a disk-shaped shim at an end face thereof disposed slidably relative to a cam nose of the cam lobe via a lubricant. The cam lobes, the shims and the lubricants used in Examples 1 to 14 and Comparative Examples 1 to 5 were made as follows and combined as shown in TABLE 1.

##### (1-1) Production of Cam lobes

[0053] The cam lobes of Examples 1 to 14 and Comparative Examples 1 to 5 were produced by cutting and grinding the following iron-based materials into a uniform cam profile and lapping them with lapping tapes in such a manner as to form their respective cam noses with different surface roughnesses ( $R_a = 0.2 \mu m$ ) as shown in TABLE 1.

##### (Iron-based materials)

##### [0054]

Low-alloy chilled cast iron: A material used for a camshaft in a mass-produced, four-cylinder engine.



Carburized SCM420: A cast of SCM420, subjected to carburization at 900°C for 1 hour, hardening with a quenching oil, heating to 200°C, and then, low-temperature hardening by air cooling.

Heat-treated S40C: A cast of S40C, subjected to heating in a vacuum furnace at 880°C for 1 hour, hardening by water cooling, heating to 200°C, and then, low-temperature hardening by air-cooling.

Tempered S40C: A cast of S40C, subjected to tempering.

## (1-2) Production of Shims

[0055] The shims were produced by subjecting disk-shaped shim bases (made of SCM420) to carburization and low-temperature hardening, grinding surfaces of the shim bases by a lapping tape in such a manner as to form the base surfaces with a surface roughness Ra of 0.03  $\mu\text{m}$ , applying various coating materials on the shim base surfaces by chemical vapor deposition (CVD) or physical vapor deposition (PVD), and then, lapping the thus-formed coatings by lapping tapes in such a manner as to form the coatings with different surface thicknesses (Ra = 0.1  $\mu\text{m}$ ) as shown in TABLE 1. The coating materials used were DLC materials, such as a-C and a-C:H, TiN and CrN. The coatings of DLC materials were formed by CVD, and the coatings of TiN and CrN were formed by PVD.

## (1-3) Preparation of Lubricants

[0056] Lubricants A to I were prepared by mixing base oils with additives including ashless fatty-ester friction modifiers and/or aliphatic-amine friction modifiers, respectively. The compositions and properties of the thus-prepared Lubricants A to I are shown in TABLE 2. In TABLE 2, the amount of base oil is indicated based on the total mass of the base oil, and the amount of additive is indicated based on the total mass of the lubricant.

## (2) Abrasion Test on Cam Units

[0057] The thus-obtained cam units were subjected to abrasion test under the following test conditions. The test results are shown in

TABLE 1.

(Test condition)
Maximum pressure: 700 MPa/Hz
Cam rotation speed: 600 rpm
Lubrication method: drop lubrication
Lubricant temperature: 100°C
Test time: 60 minutes

[0058] It is clear from TABLE 1 that the cam units of Examples 1 to 14 had excellent low-friction characteristics, with friction coefficients thereof reduced by about 30 to 50% as compared with the cam unit of Comparative Example 1.

[0059] More specifically, the cam units of Examples 1 to 9, which conformed to the above-described desirable requirements for the sliding mechanism of the present invention, had lower friction coefficients than those of Examples 10 to 14 without any deteriorations in the cam noses and the shim coatings after the abrasion test. The cam units of examples 10 to 14 had the following undesirable propensities, although their low-friction characteristics were satisfactory. That is, the cam lobe in Example 10 was susceptible to abrasion because of its lower surface hardness. In Example 11, the shim coating tended to be scuffed in a streak manner because of its lower surface hardness Hv and a smaller thickness t. In Example 12, the shim coating tended to flake off because of its a higher surface hardness Hv and a larger thickness t. In Example 13, the cam lobe was susceptible to abrasion because of its a higher surface roughness Ra. In Example 14, the cam lobe was susceptible to abrasion because the shim coating had a higher surface roughness Ra.

[0060] It is also proved that the friction reducing effect of the lubricant becomes more pronounced as the amount of zinc dithiophosphate is decreased, upon the comparison of the cam units of Examples 1, 2 and 7.

[0061] On the other hand, the cam unit of Comparative Example 1 comprised the cam lobe of low-alloy chilled cast iron, the shim of carburized SCM420 and the lubricant H with no coating of DLC material formed on the shim and no ashless fatty-ester friction modifier and/or ashless aliphatic-amine friction modifier contained in the lubricant H, which corresponded to a commonly used combination for a gasoline engine. As a result, the cam unit of Comparative Example 1 deteriorated in low-friction characteristics with its friction coefficient being higher than 0.1. It is estimated that such a deterioration in low-friction characteristics occurred because of reaction films being formed predominantly of zinc dithiophosphate (ZnDTP) on the sliding surfaces.



5 [0062] The cam unit of Comparative Example 2 was structurally the same as that of Comparative Example 1, except that the lubricant E was used in place of the lubricant H. The lubricant E contained an effective amount of ashless fatty-ester friction modifier, thereby producing a little friction reducing effect. However, the cam unit of Comparative Example 2 had a relatively high friction coefficient of about 0.1. It is also thought that such a deterioration in the low-friction characteristics occurred because of reaction films being formed predominantly of ZnDTP on the sliding surfaces.

10 [0063] The cam unit of Comparative Example 3 was structurally the same as that of Example 4, except that the lubricant I was used in place of the lubricant D. The lubricant I contained an effective amount of organomolybdenum compound, which provides a good friction reducing effect in combination with a steel material. The cam unit of Comparative Example 3, however, had a friction coefficient of nearly 0.1. It is thought that, in Comparative Example 3, the low-friction characteristics of the cam unit were deteriorated because of molybdenum disulfide films not being formed to reduce friction between the sliding surfaces.

15 [0064] The cam unit of Comparative Example 4 comprised the shim coating of TiN and the lubricant E containing an ashless fatty-ester friction modifier. Accordingly, the friction coefficient of the cam unit was slightly decreased in Comparative Example 4, but stands at nearly 0.1. The cam unit of Comparative Example 5 was structurally the same as that of Comparative Example 4, except that the shim coating was formed of CrN. There was little difference between the friction coefficients of the cam units of Comparative Examples 4 and 5.

20 [0065] As described above, the sliding mechanism of the present invention can attain excellent low-friction characteristics and high abrasion resistance by the combination of the first sliding member of DLC material, the second sliding member of iron-based material and the lubricant containing at least one of ashless fatty-ester and aliphatic-amine friction modifiers. Therefore, the sliding mechanism of the present invention, when used in an internal combustion engine, can reduce friction loss at e.g. a valve lifter dramatically and therefore provide more improvements in vehicle fuel efficiency than ever before.

25 [0066] The entire contents of Japanese Patent Application No. 2002-045576 (filed on February 22, 2002) are herein incorporated by reference.

30 [0067] Although the present invention has been described with reference to specific embodiments of the invention, the invention is not limited to the above-described embodiments. Various modification and variation of the embodiments described above will occur to those skilled in the art in light of the above teaching. The scope of the invention is defined with reference to the following claims.

TABLE 1

	Shim base		Shim coating			
	Material	Ra ( $\mu\text{m}$ )	Material	t ( $\mu\text{m}$ )	Ra ( $\mu\text{m}$ )	Hv
Example 1	SCM420	0.03	a-C	1.1	0.03	1,850
Example 2	SCM420	0.03	a-C	1.5	0.03	1,850
Example 3	SCM420	0.03	a-C	1.4	0.03	1,850
Example 4	SCM420	0.03	a-C	0.8	0.03	1,850
Example 5	SCM420	0.03	a-C	0.7	0.02	1,250
Example 6	SCM420	0.03	a-C	2.0	0.02	1,000
Example 7	SCM420	0.03	a-C	1.1	0.03	1,850
Example 8	SCM420	0.03	a-C	0.9	0.05	1,850
Example 9	SCM420	0.03	a-C	0.3	0.04	3,500
Example 10	SCM420	0.03	a-C	1.1	0.04	2,000
Example 11	SCM420	0.03	a-C:H	0.2	0.03	950
Example 12	SCM420	0.03	a-C	2.1	0.05	3,600
Example 13	SCM420	0.03	a-C	1.1	0.04	1,100
Example 14	SCM420	0.03	a-C	1.2	0.11	1,100
Comparative Example 1	SCM420	0.03	(none)	-	0.03	1,850
Comparative Example 2	SCM420	0.03	(none)	-	0.03	1,850
Comparative Example 3	SCM420	0.03	a-C	1.2	0.03	1,850
Comparative Example 4	SCM420	0.03	TiN	2.5	0.04	2,300
Comparative Example 5	SCM420	0.03	CrN	2.6	0.03	1,700

TABLE 1 (continued)

	Cam Lobe			Lubricant	Friction Coefficient
	Material	Ra ( $\mu\text{m}$ )	HRC		
Example 1	Low-alloy chilled cast iron	0.05	51	A	0.060
Example 2	Low-alloy chilled cast iron	0.05	51	B	0.067
Example 3	Low-alloy chilled cast iron	0.05	51	C	0.066
Example 4	Low-alloy chilled cast iron	0.05	51	D	0.069
Example 5	Carburized SCM420	0.04	59	A	0.068
Example 6	Heat-treated S40C	0.03	45	B	0.066
Example 7	Low-alloy chilled cast iron	0.10	51	E	0.073
Example 8	Low-alloy chilled cast iron	0.05	51	F	0.070
Example 9	Low-alloy chilled cast iron	0.05	51	G	0.068
Example 10	Tempered S40C	0.03	42	B	0.071
Example 11	Low-alloy chilled cast iron	0.05	51	B	0.079
Example 12	Low-alloy chilled cast iron	0.05	51	C	0.080
Example 13	Low-alloy chilled cast iron	0.20	51	E	0.069
Example 14	Low-alloy chilled cast iron	0.05	51	E	0.067
Comparative Example 1	Low-alloy chilled cast iron	0.10	51	H	0.12
Comparative Example 2	Low-alloy chilled cast iron	0.05	51	E	0.10
Comparative Example 3	Low-alloy chilled cast iron	0.05	51	I	0.095
Comparative Example 4	Low-alloy chilled cast iron	0.05	51	E	0.092
Comparative Example 5	Low-alloy chilled cast iron	0.05	51	E	0.088

TABLE 2

Lubricant	A	B	C	D	E
<b>Base oil</b>					
Mineral oil <sup>1)</sup> (mass%)	100	100	-	100	100
Synthetic oil <sup>2)</sup> (mass%)	-	-	100	-	-
<b>Additives</b>					
<b>Friction modifier</b>					
Fatty-ester <sup>3)</sup> (mass%)	1.0	1.0	1.0	-	1.0
Aliphatic amine <sup>4)</sup> (mass%)	-	-	-	1.0	-
Organomolybdenum compound <sup>5)</sup> (mass%)	-	-	-	-	-
Ashless dispersant <sup>6)</sup> (mass%)	5.0	5.0	5.0	5.0	5.0
Antioxidant <sup>7)</sup> (mass% in terms of phosphorus)	-	0.047	0.047	0.047	0.094
Metallic detergent <sup>8)</sup> (mass%)	0.5	0.5	0.5	0.5	0.5
Metallic detergent <sup>9)</sup> (mass%)	0.9	0.9	0.9	0.9	0.9
Others <sup>10)</sup> (mass%)	7.0	7.0	7.0	7.0	7.0
<b>Properties</b>					
Kinematic viscosity at 100°C (mm <sup>2</sup> /s)	10.3	10.2	10.0	10.2	10.3
Total base number <sup>11)</sup> (mgKOH/g)	6.2	6.2	6.2	6.2	6.5
Total base number <sup>12)</sup> (mgKOH/g)	4.5	4.5	4.5	4.5	5.2

## [Remarks]

<sup>1)</sup> Hydrocracked mineral oil (kinematic viscosity at 100°C: 5.0 mm<sup>2</sup>/s, viscosity index: 120, aromatic content: 5.5%)

<sup>2)</sup> 1-Decene oligomer hydride (kinematic viscosity at 100°C: 3.9 mm<sup>2</sup>/s, viscosity index: 124, aromatic content: 0.0%)

<sup>3)</sup> Glycerol monolate

<sup>4)</sup> N,N-dipolyoxyethylene-N-oleylamine

<sup>5)</sup> Molybdenum dithiocarbamate (molybdenum content: 4.1%)

<sup>6)</sup> Polybutenyl succinimide (nitrogen content: 1.2%)

<sup>7)</sup> Zinc dialkyldithiophosphate (zinc content: 9.3%, phosphorus content: 8.5%, alkyl group: secondary butyl or hexyl group)

<sup>8)</sup> Calcium sulfonate (total base number: 300 mgKOH/g, calcium content: 12.0%)

<sup>9)</sup> Calcium phenate (total base number: 255 mgKOH/g, calcium content: 9.2%)

<sup>10)</sup> Including viscosity index improver, antioxidant, rust inhibitor, demulsifier, nonionic surfactant, metal deactivator and anti-foaming agent

<sup>11)</sup> Measured by perchloric acid method (according to ISO 3771)

<sup>12)</sup> Measured by hydrochloric method (according to ISO 3771)

TABLE 2 (continued)

	F	G	H	I
<b>Base oil</b>				
Mineral oil <sup>1)</sup> (mass%)	100	100	100	100
Synthetic oil <sup>2)</sup> (mass%)	-	-	-	-
<b>Additives</b>				
<b>Friction modifier</b>				
Fatty acid ester <sup>3)</sup> (mass%)	1.0	0.2	-	-
Aliphatic amine <sup>4)</sup> (mass%)	0.5	-	-	-
Organomolybdenum compound <sup>5)</sup> (mass%)	-	-	-	1.1
Ashless dispersant <sup>6)</sup> (mass%)	5.0	5.0	5.0	5.0
Antioxidant <sup>7)</sup> (mass% in terms of phosphorus)	0.094	0.047	0.094	0.094
Metallic detergent <sup>8)</sup> (mass%)	0.5	0.5	0.5	0.5
Metallic detergent <sup>9)</sup> (mass%)	0.9	0.9	0.9	0.9
Others <sup>10)</sup> (mass%)	7.0	7.0	7.0	7.0
<b>Properties</b>				
Kinematic viscosity at 100°C (mm <sup>2</sup> /s)	10.3	10.3	10.3	10.2
Total base number <sup>11)</sup> (mgKOH/g)	6.5	6.5	6.5	7.5
Total base number <sup>12)</sup> (mgKOH/g)	5.2	5.2	5.2	6.0

#### Claims

1. A low-friction sliding mechanism, comprising:

first and second sliding members slidable relative to each other at sliding surfaces thereof, the first sliding member being made of a diamond-like carbon material, the second sliding member being made of an iron-based material; and  
a lubricant applied to the sliding surfaces of the first and second sliding members and comprising at least one of an ashless fatty-ester friction modifier and an ashless aliphatic-amine friction modifier.

2. The low-friction sliding mechanism according to Claim 1, wherein the diamond-like carbon material is a material selected from the group consisting of hydrogen-free amorphous carbon, hydrogen-containing amorphous carbon and metal carbide, and the iron-based material is at least one material selected from the group consisting of low-alloy chilled cast iron, carburized steel and heat-treated carbon steel.
3. The low-friction sliding mechanism according to Claim 2, wherein the diamond-like carbon material is hydrogen-free amorphous carbon.
4. The low-friction sliding mechanism according to any one of Claims 1 to 3, wherein each of the first and second

sliding members has at the sliding surface thereof an arithmetic mean surface roughness of 0.1  $\mu\text{m}$  or less.

- 5 5. The low-friction sliding mechanism according to any one of Claims 1 to 4, wherein the first sliding member has a micro Vickers hardness of 1,000 to 3,500 with a 1 kg load applied at the sliding surface thereof and a thickness of 0.3 to 2.0  $\mu\text{m}$ , and the second sliding member has a Rockwell hardness of 45 to 60 on C scale at the sliding surface thereof.
6. The low-friction sliding mechanism according to any one of Claims 1 to 5, for use in an internal combustion engine.
- 10 7. The low-friction sliding mechanism according to Claim 6, wherein the first sliding member is a coating of the diamond-like carbon material on either of a steel base portion of a shim and a steel end face of a lifter, and the second sliding member is a cam lobe.
- 15 8. The low-friction sliding mechanism according to any one of Claims 1 to 7, wherein the fatty-ester friction modifier and the aliphatic-amine friction modifier are a fatty acid ester and an aliphatic amine having  $\text{C}_6\text{-C}_{30}$  straight or branched hydrocarbon chains, respectively, and said at least one of the fatty-ester friction modifier and the aliphatic-amine friction modifier is contained in an amount of 0.05 to 3.0% by mass based on a total mass of the lubricant.
- 20 9. The low-friction sliding mechanism according to any one of Claims 1 to 8, wherein the lubricant further comprises polybutenyl succinimide and/or derivative thereof in an amount of 0.1 to 15% by mass based on a total mass of the lubricant.
- 25 10. The low-friction sliding mechanism according to any one of Claims 1 to 9, wherein the lubricant further comprises zinc dithiophosphate in an amount of 0.1% or less by mass in terms of phosphorus element based on a total mass of the lubricant.

30

35

40

45

50

55



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 03 00 3165

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	WO 01 05917 A (INFINEUM INTERNAT LTD ;MIYOSHI TAISUKE (JP); HARTLEY ROLFE JOHN (U) 25 January 2001 (2001-01-25) * page 13, line 15 - page 15, line 28; claims 1-13 *	1-10	C10M141/02 C10M141/06 //(C10M141/06, 101:02,129:76, 133:06,133:56, 137:10,159:22, 159:24), C10N40:25
Y	WO 93 21289 A (EXXON CHEMICAL PATENTS INC) 28 October 1993 (1993-10-28) * page 24, line 7 - page 27; claims 1,21; examples 2-6 *	1-10	
A	WO 92 02602 A (EXXON CHEMICAL PATENTS INC) 20 February 1992 (1992-02-20) * page 21 - page 22; claim 1 *	1-10	
Y	DATABASE WPI Week 200065, 28 November 2000 (2000-11-28) Derwent Publications Ltd., London, GB; AN 2000640583 XP002240184 & JP 2000 327484 A (KAWASAKI HEAVY IND LTD) * abstract *	1-10	
Y	& PATENT ABSTRACTS OF JAPAN vol. 2000, no. 14, 3 May 2001 (2001-05-03) & JP 2000 327484 A (KAWASAKI HEAVY IND LTD), 28 November 2000 (2000-11-28) * abstract *	1-10	TECHNICAL FIELDS SEARCHED (Int.Cl.7)  C10M
The present search report has been drawn up for all claims			
Place of search <b>MUNICH</b>		Date of completion of the search <b>26 May 2003</b>	Examiner <b>Glod, G</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &amp;: member of the same patent family, corresponding document</p>			

EPO FORM 1500 03 02 (P04001)



# ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 03 00 3165

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-05-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0105917	A	25-01-2001	US 6333298 B1	25-12-2001
			CA 2379492 A1	25-01-2001
			WO 0105917 A1	25-01-2001
			EP 1200542 A1	02-05-2002
			JP 2003505533 T	12-02-2003
			US 2002137636 A1	26-09-2002
WO 9321289	A	28-10-1993	AU 3976993 A	18-11-1993
			CA 2132523 A1	28-10-1993
			EP 0638117 A1	15-02-1995
			JP 7508049 T	07-09-1995
			MX 9302130 A1	31-05-1994
			WO 9321289 A1	28-10-1993
WO 9202602	A	20-02-1992	CA 2086757 A1	01-02-1992
			DE 69116697 D1	07-03-1996
			DE 69116697 T2	30-05-1996
			EP 0553100 A1	04-08-1993
			JP 2777750 B2	23-07-1998
			JP 5509125 T	16-12-1993
			US 5282990 A	01-02-1994
			WO 9202602 A1	20-02-1992
JP 2000327484	A	28-11-2000	JP 3051404 B2	12-06-2000

EPO FORM P0439

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82